

# HARD JAWS (HJ-SERIES) FOR HYDRAULIC CHUCKS




## ■ SPECIFICATIONS

UNIT:mm

《 Parts & Accessories 》

## ■ DIMENSIONS

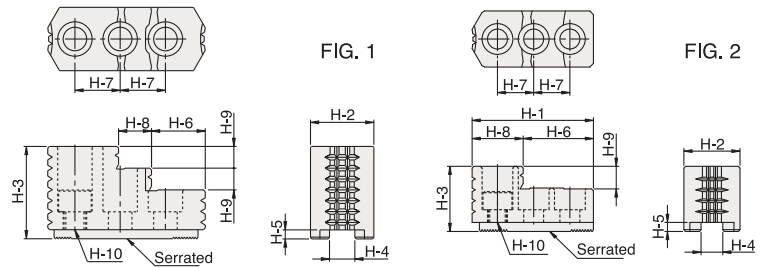

MODEL / SPEC.	H-1	H-2	H-3	H-4	H-5	H-6	H-7	H-8	H-9	H-10	Serration Pitch	Weight (kg)	Reference Drawing
HJ-05	53	23	28	10	4	29	14	24	10	M8x1.25P	1.5 x 60°	0.4	Fig.2
HJ-06	67	31	36	12	5	39	20	28	12	M10x1.5P	1.5 x 60°	0.95	Fig.2
HJ-08	87	35	51	14	5	29.5	25	18	12	M12x1.75P	1.5 x 60°	1.9	Fig.1
HJ-10	101	40	54	16	5	45.5	30	18	13	M12x1.75P	1.5 x 60°	2.8	Fig.1
HJ-12	108	50	67	21(18)	4(5)	49	30	20	16	M16x2P	1.5 x 60°	3.5	Fig.1
HJ-15	143	62	86	22(25.5)	8(5)	55	43	38	20	M20x2.5P	1.5 x 60°	9.5	Fig.1

# SOFT JAWS (SJ-SERIES) FOR HYDRAULIC CHUCKS




## ■ SPECIFICATIONS

UNIT:mm

《 Parts & Accessories 》

## ■ DIMENSIONS

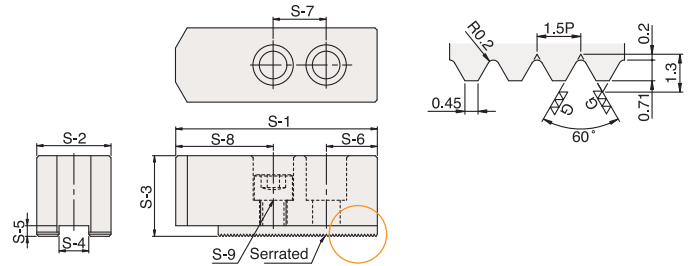

MODEL / SPEC.	S-1	S-2	S-3	S-4	S-5	S-6	S-7	S-8	S-9	Serration Pitch	Weight (kg)
SJ-05	62	25	30	10	4.5	10	14	38	M8x1.25P	1.5 x 60°	0.85
SJ-06	73	31	36	12	5	15	20	38	M10x1.5P	1.5 x 60°	1.5
SJ-08	95	35	38	14	5	24	25	46	M12x1.75P	1.5 x 60°	2.4
SJ-10	110	40	42	16	5	30	30	50	M12x1.75P	1.5 x 60°	3.6
SJ-12	129	50	50	21(18)	6	39	30	60	M16x2P (M14x2P)	1.5 x 60°	6.1
SJ-15	165	62	62	22(25.5)	8(5)	37	43	85	M20x2.5P	1.5 x 60°	12.5

# SPECIAL SOFT JAWS FOR HYDRAULIC CHUCKS

《 Parts & Accessories 》

## ■ LONGER, HIGHER, WILDER

