

MTK-T

《 Pneumatic Chucks series 》




2-JAW SUPER PRECISION AIR CHUCK FIXTURES

NEW

Patent Protected

Superior Repeatability of 1 μ m.

■ DIMENSIONS

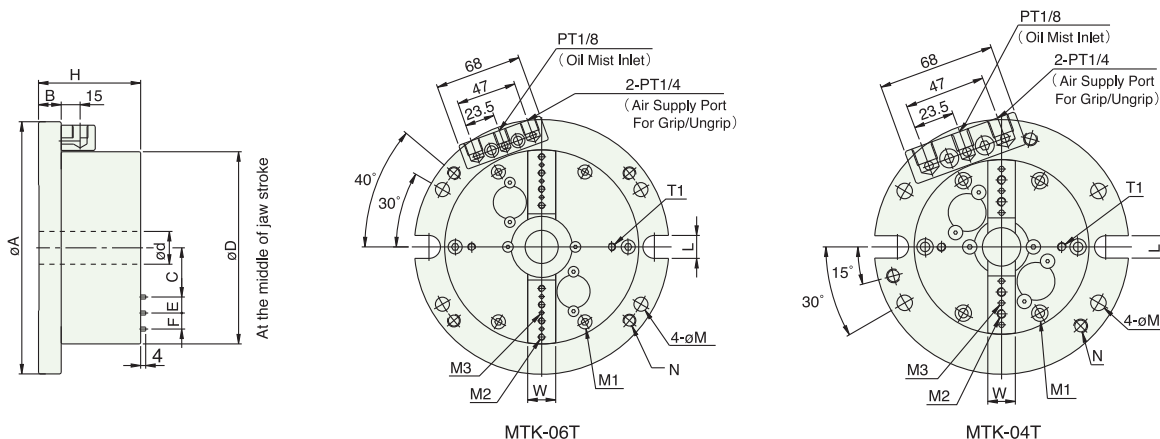

■ SPECIFICATIONS

UNIT:mm

MODEL / SPEC.	A	B	C	D	d (H7)	E	F	H	W
MTK-04T	148	17	20.75	101.6	18	12.7	12.7	80	16
MTK-06T	200	18	39.75	152.4	26	12.7	12.7	81	22

MODEL / SPEC.	L	M	M1	M2
MTK-04T	13	$\phi 9$ (PCD $\phi 130$)	6-M5x0.8P(PCD $\phi 88.9$)	4-M5x0.8P
MTK-06T	18	$\phi 11$ (PCD $\phi 180$)	6-M6x1P(PCD $\phi 135.89$)	8-M5x0.8P

MODEL / SPEC.	M3	N	T1	Jaw T.I.R
MTK-04T	6- $\phi 3.18$	3-M8x1.25P	2-M5x0.8P(PCD $\phi 70$)	0.001
MTK-06T	6- $\phi 3.18$	4-M10x1.5P	2-M6x1P(PCD $\phi 110$)	0.001

MODEL / SPEC.	Jaw Stroke (Diameter) (mm)	Repeatability	Gripping Force At Air Pressure 7 kgf/cm ² (0.7Mpa) kgf	(KN)
MTK-04T	3	0.001	310	(3.1)
MTK-06T	3	0.001	790	(7.8)

Examples Of Attaching Pneumatic Manual Switch / Optional Accessories



Split type hand control valve