


# 6 Jaw High Speed (HH6JA Series) Solid Center Power Chucks

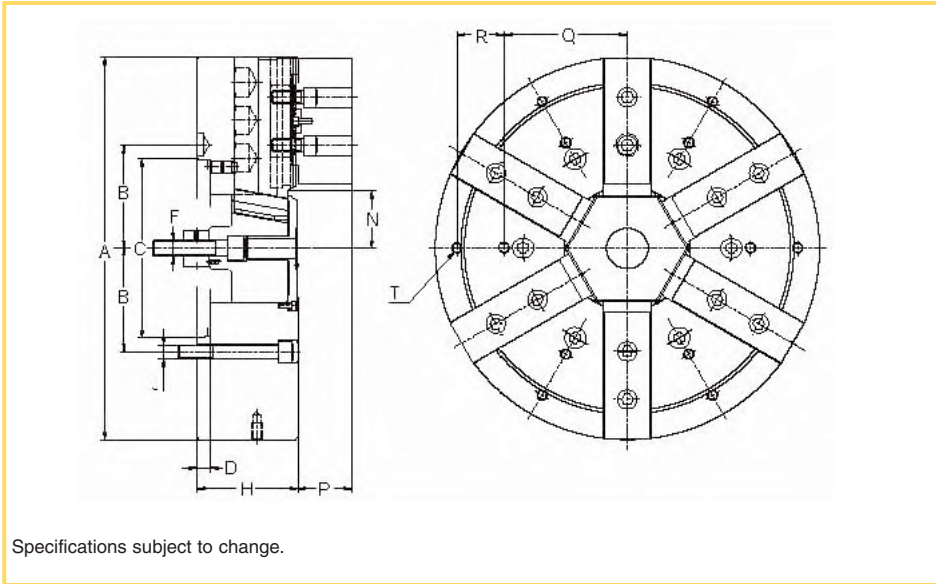

## ■ SPECIFICATIONS

UNIT: mm

SPEC.	MODEL	HH6JA11-24	HH6JA11-32	HH6JA15-36	HH6JA20-50
Max Speed	min <sup>-1</sup>	955	940	720	450
Stroke of Jaw	(mm in dia)	12	17.5	17.5	17.5
Shifter Stroke	mm	35	50	50	50
Chucking Diameter	max	540	731.7	820	1143
	min	90	125	134.8	200
Gripping Force	kN	147	196	196	196
	kgf	15000	20000	20000	20000
Max Draw-Pull	kN	53.4	73.5	73.5	73.5
	kgf	5450	7500	7500	7500
Weight	kg	285	455	760	1700
GD <sup>2</sup>	N*m <sup>2</sup>	626.2	1473.9	3112	13434.8
	kgf*m <sup>2</sup>	63.9	150.4	317.5	1370.9
Applicable Cylinder		RNKP200-50	RNKP200-50	RNKP200-50	RNKP200-50

SIZE	MODEL	HH6JA11-24	HH6JA11-32	HH6JA15-36	HH6JA20-50
A		600	813	914	1270
B		117.5	117.5	165.1	231.3
C		A11	A11	A15	A20
D		19.5	19.5	21	23
F		M27xP3.0	M27xP3.0	M30xP3.5	M30xP3.5
H		160	180	180	201
J		6-M20	6-M20	6-M22	6-M24
N	max	95	95	95	132
	min	89	86.25	86.25	123.2
P		70	70	70	70
Q		150	150	150	120
R		100	150	150	75
T		12-M16x30DP	12-M16x30DP	12-M16x25DP	12-M16x25DP